
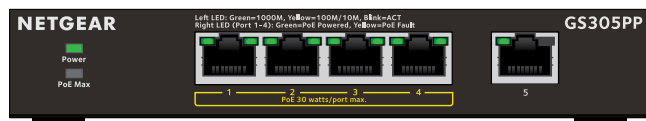


Installation Guide

5-Port Gigabit Ethernet PoE Unmanaged Switch GS305P (55W)

5-Port Gigabit Ethernet PoE+ Unmanaged Switch GS305PP (83W)

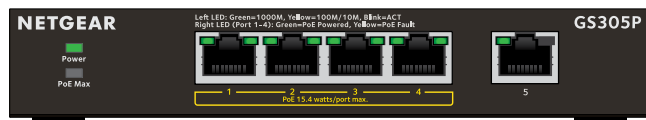

Package contents

- Switch model GS305P or GS305PP
- DC power adapter
- Detachable power cable (varies by region)
- Wall-mount kit
- Four rubber footpads
- Installation guide

Note: We recommend that you use Category 5e (Cat 5e) cable or higher for Gigabit Ethernet connections.

1. Register with the NETGEAR Insight app

1. Search for **NETGEAR Insight** and download the latest app.




2. Set up a NETGEAR account if you do not have one.
3. Tap the menu in the upper-left corner.
4. Tap **REGISTER ANY NETGEAR DEVICE**.
5. Enter the serial number located on the bottom of the switch, or use the camera on your mobile device to scan the serial number bar code.
6. Tap **GO**.

The switch is registered and added to your account. You can now view the switch in the NETGEAR Insight app.

Note: Because this is an unmanaged switch, you cannot configure or manage it in NETGEAR Insight.

2. Connect the switch

The GS305PP switch supports both 802.3at (PoE+) and 802.3af (PoE). Model GS305P supports 802.3af (PoE) only.

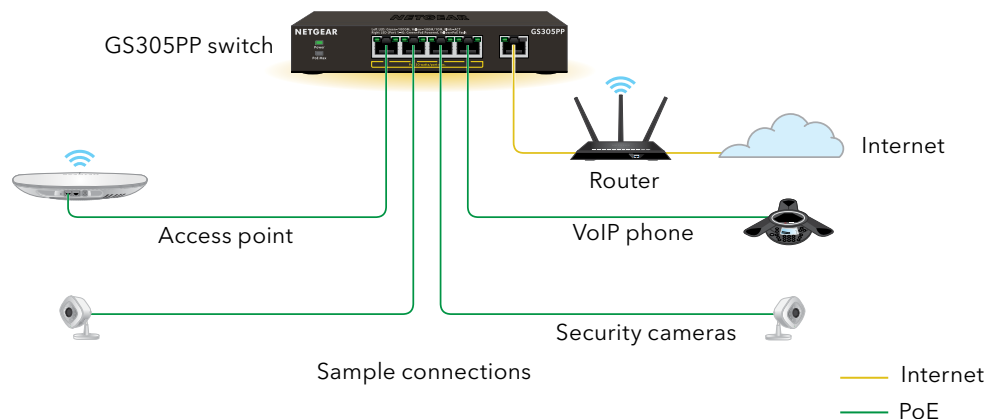

3. Check the LEDs

When you connect the power adapter to the switch and plug it into an electrical outlet, the LEDs indicate the status.

The GS305P provides PoE power on ports 1-4 up to 15.4W PoE to each port, with a PoE power budget of 55.5W across all active PoE ports. The GS305PP provides PoE+ or PoE power on ports 1-4 up to 30W PoE to each port, with a PoE power budget of 83W across all active PoE ports.

LED	Description
Power	<ul style="list-style-type: none"> On. The switch is receiving power. Off. The switch is not receiving power.
Ports 1-5 left port	<ul style="list-style-type: none"> On. 1000 Mbps link on this port. On. 100 Mbps or 10 Mbps link on this port. Blinking. 1000 Mbps activity on this port. Blinking. 100 Mbps or 10 Mbps activity on this port. Off. No link is detected on this port.
Ports 1-4 right port	<ul style="list-style-type: none"> On. PoE is in use. On. PoE halted. Off. PoE is not in use on this port.
PoE Max	<p>The PoE Max LED indicates the status of the PoE budget on the switch:</p> <ul style="list-style-type: none"> Off Sufficient. More than 7W of PoE power is available. On. Less than 7W of PoE power is available. Blinking. At least once during the previous two minutes, less than 7W of PoE power was available.

PoE considerations

The PoE and PoE+ power supplied by the switch is prioritized in ascending port order (from port 1 to port 4), with a total power budget of 55.5 watts for the GS305P switch and 83W for the GS305PP. If the power requirements for the attached powered devices (PDs) exceed the total power budget of the switch, the PD on the highest-numbered port is disabled to make sure that the PDs that are connected to the higher-priority, lower-numbered ports are supported first.

Just because a PD is listed as an 802.3at PoE powered device does not necessarily mean that it requires the maximum power limit of the specification. Many PDs require less power, potentially allowing all four PoE ports to be active simultaneously.

You can override the detected device class and specify the power allocation for the device connected to each port. The following table shows the standard power ranges with no overrides applied and calculated with the maximum cable length of 328 feet (100 meters).

Device Class	Standard	Class Description	Power Reserved by the Device	Power Delivered to the Device
0	PoE and PoE+	Default power (full)	15.4W	0.44W-12.95W
1	PoE and PoE+	Very low power	4.0W	0.44W-3.84W
2	PoE and PoE+	Low power	7.0W	3.84W-6.49W
3	PoE and PoE+	Mid power	15.4W	6.49W-12.95W
4	PoE+ only	High power	30.0W	12.95W-25.5W

If a device receives insufficient PoE power from the switch, consider using a shorter cable.



201-25341-03

July 2019

© NETGEAR, Inc., NETGEAR and the NETGEAR Logo are trademarks of NETGEAR, Inc. Any non-NETGEAR trademarks are used for reference purposes only.

PoE Troubleshooting

Here are some tips for correcting PoE problems that might occur:

- If the PoE Max LED is solid amber, disconnect one or more PoE devices to prevent PoE oversubscription. Start by disconnecting the device from the highest-numbered port.
- For each powered device (PD) that is connected to the switch, the associated right port LED on the switch lights solid green. If the right port LED lights solid amber, a PoE fault occurred and PoE halted because of one of the conditions listed in the following table.

PoE Fault Condition	Possible Solution
A PoE-related short circuit occurred on the port.	The problem is most likely with the attached PD. Check the condition of the PD or restart the PD by disconnecting and reconnecting the PD.
The PoE power demand of the PD exceeded the maximum level that the switch permits. The maximum level is 15.4 for a PoE connection or 30W for a PoE+ connection	
The PoE current on the port exceeded the classification limit of the PD.	
The PoE voltage of the port is outside the range that the switch permits	Restart the switch to see if the condition resolves itself.

Mount the switch on a wall

We recommend that you use the wall-mount screws that came with the switch.

1. Locate the two mounting holes on the bottom panel of the switch.
2. Mark and drill two mounting holes in the wall where you want to mount the switch.
The two mounting holes must be 1.53 in. (38.9 mm) apart, center-to-center.
3. Insert the supplied anchors into the wall and tighten the screws with a No. 2 Phillips screwdriver.
Leave about 0.125 in. (4 mm) of each screw protruding from the wall so that you can insert the screws into the holes on the bottom panel.

Support

Thank you for purchasing this NETGEAR product. You can visit <https://www.netgear.com/support/> to register your product, get help, access the latest downloads and user manuals, and join our community. We recommend that you use only official NETGEAR support resources.

Si ce produit est vendu au Canada, vous pouvez accéder à ce document en français canadien à <https://www.netgear.com/support/download/>. (If this product is sold in Canada, you can access this document in Canadian French at <https://www.netgear.com/support/download/>.)

For regulatory compliance information including the EU Declaration of Conformity, visit <https://www.netgear.com/about/regulatory/>.

See the regulatory compliance document before connecting the power supply.

Do not use this device outdoors. If you connect cables or devices that are outdoors to this device, see <https://kb.netgear.com/000057103> for safety and warranty information.

NETGEAR, Inc.
350 East Plumeria Drive
San Jose, CA 95134, USA



NETGEAR INTERNATIONAL LTD
Floor 1, Building 3,
University Technology Centre
Curraheen Road, Cork,
T12EF21, Ireland