





LED and Button Descriptions

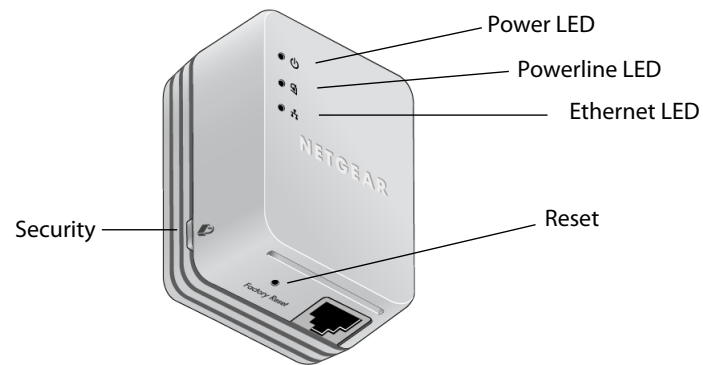

Item	Description			
	<ul style="list-style-type: none"> Solid green. The electrical power is on. Blinking green. The adapter is restarting or setting up security. Amber. Power saving mode. Off. There is no electrical power. 			
	<ul style="list-style-type: none"> Solid. The adapter is connected to a Powerline network. Blinking. The adapter is sending or receiving data. Off. The adapter has not found any other compatible Powerline devices using the same encryption key. <p>The Pick A Plug feature lets you pick the electrical outlet with the strongest link rate, indicated by the color displayed by the LED:</p> <table border="1"> <tr> <td>Green: Link rate > 80 Mbps (Best)</td> <td>Amber: Link rate > 50 and < 80 Mbps (Better)</td> <td>Red: Link rate < 50 Mbps (Good)</td> </tr> </table>	Green: Link rate > 80 Mbps (Best)	Amber: Link rate > 50 and < 80 Mbps (Better)	Red: Link rate < 50 Mbps (Good)
Green: Link rate > 80 Mbps (Best)	Amber: Link rate > 50 and < 80 Mbps (Better)	Red: Link rate < 50 Mbps (Good)		

Item	Description
	<ul style="list-style-type: none"> Solid. The Ethernet port is linked, but there is no activity. Blinking. There is traffic on the Ethernet port. Off. There is no Ethernet connection.
Factory Reset	Press the Factory Reset button for 1 second, then release it to turn the Powerline adapter to its factory default settings.
Security Button	After you plug in your new AV adapter, press the security button for 2 seconds, then press the security button on one of the other AV adapters in your existing network for 2 seconds. Both buttons must be pressed within 2 minutes. Note: The Security button does not work in power saving mode (see "Power LED is amber" in the "Troubleshooting Tips" table below).

Warning: Do not press the **Security** button on the Powerline adapter until installation is complete and the adapters are communicating with each other (indicated by the blinking Powerline LED). Pressing this button too soon can temporarily disable Powerline communication. If this should occur, use the **Factory Reset** button to return the Powerline adapter to its factory default settings.

Recording your Password

Before you install your XAV2101 adapter into your existing Powerline network, find its password, which is shown on the back of the device, and record it here:

Troubleshooting Tips

Power LED is off	Make sure that power is supplied to the electrical outlet, and that the Powerline devices are not plugged into an extension cord, power strip, or surge protector.
Power LED is amber	Power saving mode occurs when the Ethernet LED is off. This can occur when: <ul style="list-style-type: none"> The Ethernet cable is unplugged. The device connected through the Ethernet cable is turned off. The adapter is idle for 10 minutes. It returns to normal mode within 2 seconds once the Ethernet link is up.
Powerline LED is off	<ul style="list-style-type: none"> If you have set network security, make sure that all Powerline devices are using the same encryption key; see the online <i>User Manual</i> for details. Press the Reset button on each device for 1 second to return the Powerline adapter to its factory default settings.
Powerline LED is amber or red	Move the Powerline device to a closer location.
Ethernet LED is not blinking	<ul style="list-style-type: none"> Make sure that the Ethernet cables are working and securely plugged into the devices. Press the Reset button on each device for 1 second to return the Powerline adapter to its factory default settings.



This symbol was placed in accordance with the European Union Directive 2002/96 on the Waste Electrical and Electronic Equipment (the WEEE Directive). If disposed of within the European Union, this product should be treated and recycled in accordance with the laws of your jurisdiction implementing the WEEE Directive.

©2010 by NETGEAR, Inc. All rights reserved. NETGEAR and the NETGEAR logo are registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice.



201-13209-01



December 2010

NETGEAR®

Installation Guide


Connect with Innovation™

Powerline AV 200 Nano Adapter XAV2101

Package Contents




Powerline AV 200 Nano Adapter

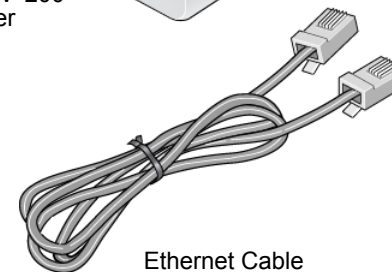


Ethernet Cable

Existing Powerline Network

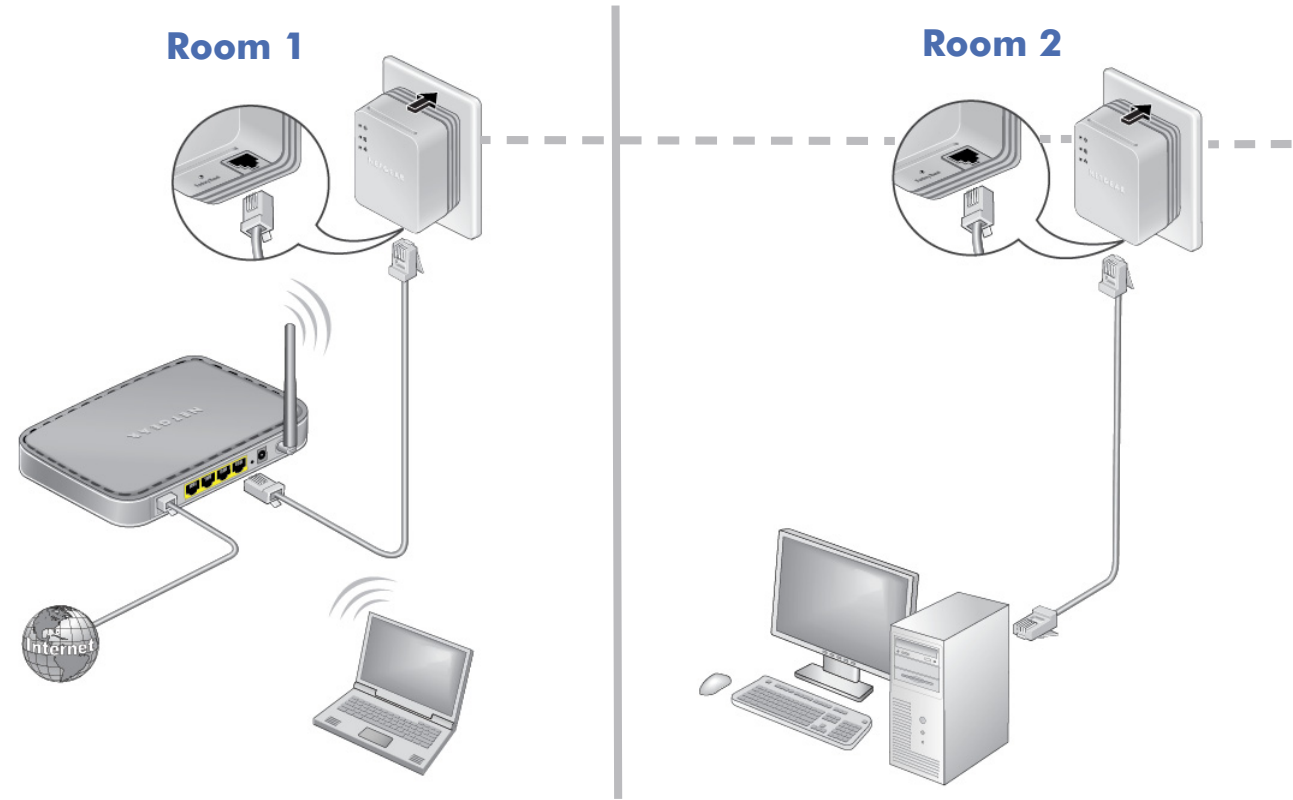

Add a Powerline Adapter

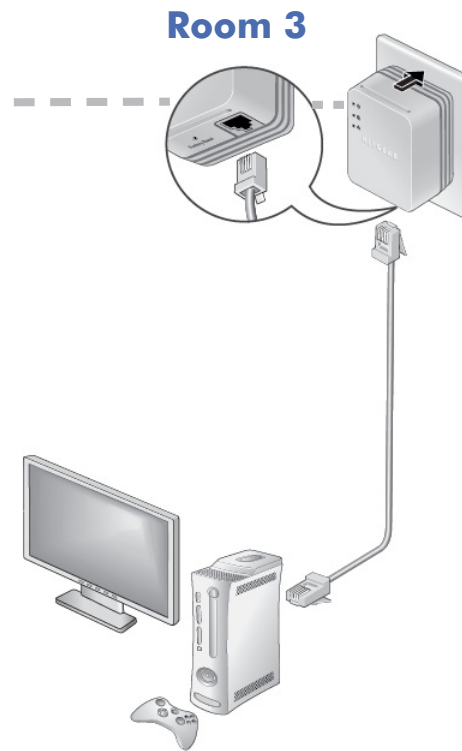

Compatible Powerline and HomePlug AV certified devices include the NETGEAR XAV101, XAV1004, XAV1501, XAV2001, XAV2501, and XAVN2001. For a complete list of AV certified devices, go to http://www.homeplug.org/certified_products

Safety Information

- AC input: 100-240V~, 0.2A (Max).
- Operating temperature: 0C~40C.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.

Technical Support

Thank you for selecting NETGEAR products. After installing your device, locate the serial number on the label of your product and use it to register your product at <http://www.NETGEAR.com/register>. Registration is required before you can use our telephone support service. Registration via our website is strongly recommended.

Go to <http://www.NETGEAR.com/support> for product updates and Web support.

GPL may be included with this product; for GNU General Public License (GPL) related information, please visit http://kbserver.netgear.com/kb_web_files/open_src.asp

For complete DoC, please visit the NETGEAR EU Declarations of Conformity website at: http://kb.netgear.com/app/answers/detail/a_id/11621