

NETGEAR®

User Manual

Nighthawk® A9000 WiFi 7 USB 3.0 Adapter

April 2025
202-12768-02

NETGEAR, Inc.

350 E. Plumeria Drive
San Jose, CA 95134, USA

Support and Community

Get your questions answered and access the latest downloads at netgear.com/support, and check out our NETGEAR Community at community.netgear.com.

Regulatory and Legal

For regulatory compliance information including the EU Declaration of Conformity, visit netgear.com/about/regulatory. See the regulatory compliance document before connecting the power supply. For NETGEAR's Privacy Policy, visit netgear.com/about/privacy-policy.

Where permitted by law, by using this device, you are agreeing to NETGEAR's Terms and Conditions at netgear.com/about/terms-and-conditions. If you do not agree, return the device to your place of purchase within your return period.

For 6 GHz devices not designed for outdoor use: Only use the device indoors. The operation of 6 GHz devices is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet. Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

Applicable to 6 GHz devices only: Only use the device indoors. The operation of 6 GHz devices is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet. Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

Trademarks

©NETGEAR, Inc. NETGEAR and the NETGEAR Logo are trademarks of NETGEAR, Inc. Any non-NETGEAR trademarks are used for reference purposes only.

Contents

Chapter 1 Get Started and Connect to a WiFi Network

Copy or Download the A9000 Installation Program.....	5
Set Up and Install the Adapter.....	5
Join a WiFi Network.....	6
Join a Network Using the Adapter Driver.....	6

Chapter 2 Monitor and Maintain the Adapter

View the Connection Status and Details.....	10
Upgrade the Adapter Software.....	10
Uninstall the Adapter Software.....	10

Chapter 3 Troubleshooting and Frequently Asked Questions

Troubleshooting.....	12
Adapter LED is Not Lit.....	12
When I Connect to the Network, I Cannot Access Shared Resources Such as Printers.....	12
Adapter Lost Its IP Address.....	12
Frequently Asked Questions.....	13
Do USB Ports Go into Sleep Mode if No Traffic Is Going to or from the Port?.....	13
How Can I Improve the Speed of My WiFi Connection?.....	13
How Can I View the IP Address of the Adapter?.....	14
What Types of WiFi Security Does the Adapter Support?.....	14

1

Get Started and Connect to a WiFi Network

The NETGEAR A9000 WiFi 7 USB adapter connects your notebook or desktop computer over WiFi to an 11be or other network for applications such as lag-free video streaming throughout your home, online gaming, and secure and reliable Internet connections.

This chapter describes how to set up and connect the A9000 WiFi 7 USB adapter, in this manual referred to as *the adapter*, to a WiFi network. The chapter includes the following sections:

- [Copy or Download the A9000 Installation Program](#) on page 5
- [Set Up and Install the Adapter](#) on page 5
- [Join a WiFi Network](#) on page 6

❗ **NOTE:** For more information about the topics covered in this manual, visit the support website at support.netgear.com.

❗ **NOTE:** You can register your A9000 with NETGEAR and receive notifications with firmware updates. Firmware updates with new features and bug fixes are made available from time to time at downloadcenter.netgear.com.

Copy or Download the A9000 Installation Program

The adapter installation program is provided:

- On the USB thumb drive included in the A9000 package.
- On the NETGEAR download site.

To obtain the A9000 standalone adapter installation program:

1. Copy or download the installation program
 - a. Copy the installation program from the supplied USB thumb drive to your computer.



- b. Visit <https://www.netgear.com/A9000-download> and download the latest software file.
2. Follow the steps in [Set Up and Install the Adapter](#) on page 5 to run the installation program.

Set Up and Install the Adapter

Before you begin using your adapter, set up the adapter by running the installation program to install the required drivers.

To install the Windows driver:

1. Make sure your computer is running an up-to-date version of Windows 11.

For more information about updating Windows, see Microsoft's [Update Windows](#) support article.

2. Complete the steps described in [Copy or Download the A9000 Installation Program](#) on page 5 to download the latest software file for Windows.
3. Run the A9000 installation program:
 - a. To start extraction of the installation files, double-click on the file that was copied or downloaded and is named **A9000 Windows Installation Program V.xxxx**, where **xxxx** is the version number.
 - b. Double-click on the file that was copied or downloaded and is named **A9000 Windows Installation Program V.xxxx.exe** where **xxxx** is the version number.

❗ **NOTE:** If a User Account Control window appears that asks if you want to allow the app to make changes to your device, select **Yes**.
 - c. Follow the prompts to complete installation. When prompted, you can remove the USB thumb drive, and insert the Nighthawk A9000 WiFi 7 USB 3.0 adapter into your computer's USB port.

❗ **NOTE:** The installation program gives you the option to disable other WiFi adapters. For best performance, we recommend that you disable other adapters.
4. Click **Finish** to exit the installation wizard.

Join a WiFi Network

The adapter can join a known WiFi network by using the adapter standalone driver.

- Install the adapter's standalone driver.
- Use the WiFi network settings on your computer to join a WiFi network (see [Join a Network Using the Adapter Driver](#) on page 6).

❗ **NOTE:** While your adapter can connect to WiFi networks using WEP and WPA-PSK WiFi security, we recommend that you use newer and more secure options like WPA2-PSK or WPA3 if your devices support them. WEP and WPA-PSK use older and less secure encryption, so use caution when connecting to such networks.

Join a Network Using the Adapter Driver


This task describes how to join a WiFi network using the adapter.

! **NOTE:** The adapter provides the best performance with a USB 3.0 port but is compatible with a USB 2.0 or USB 1.1 port.

To join a WiFi network:


1. Connect your adapter to your computer's USB port with or without the desktop cradle.
 - With the desktop cradle, place the adapter into the desktop dock and connect the USB cable to the USB port on your computer.

! **NOTE:** NETGEAR does not recommend that you use another cable to connect the adapter to the USB port on your computer. Use the desktop dock with the attached cable that is supplied in the package. Using another USB cable might affect the performance and correct functioning of the adapter.

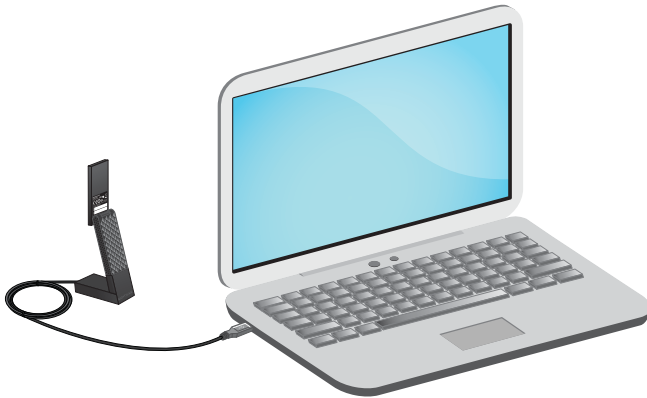

! **NOTE:** When the adapter is placed in the desktop dock, you can fold out the adapter to its maximum angle for increased WiFi performance.

- Without the desktop cradle, insert the adapter into a USB port on your computer.

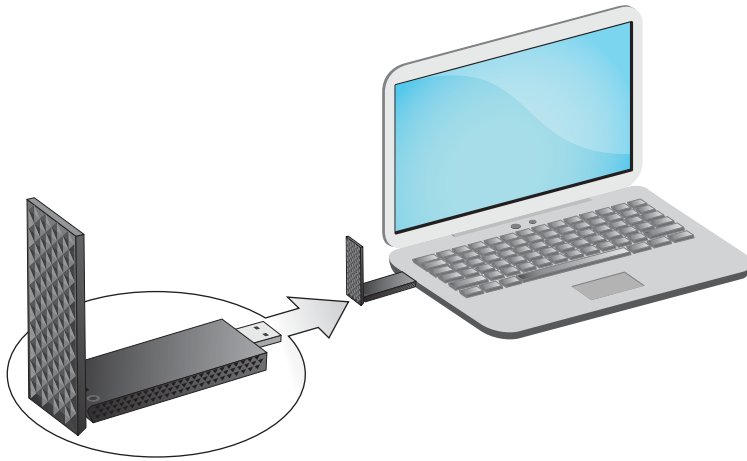

2. Open the WiFi network settings on your computer by right-clicking the WiFi icon. (📶) or the No Internet Access icon (🌐), which display in the lower right corner of your screen
 3. Click **Manage Wi-Fi connections (>)**, which is next to the WiFi icon.
 4. Select your network's name (SSID).
 5. Click **Connect**.
 6. Enter the network security key (WiFi password).
 7. Click **Next**.
- When you see the message "Connected, secured," setup is complete.
8. Press the **ESC** key on the desktop to exit WiFi network settings.

2

Monitor and Maintain the Adapter

This chapter includes the following sections:

- [View the Connection Status and Details](#) on page 10
- [Upgrade the Adapter Software](#) on page 10
- [Uninstall the Adapter Software](#) on page 10

View the Connection Status and Details

You can check your network connection status in Windows.

To view connection status and details:

1. Select the **Start** button, then enter **Settings**.
2. Select **Settings > Network & Internet**.

Upgrade the Adapter Software

You can upgrade the adapter software by downloading and running the latest installation program.

If you have registered with NETGEAR, then NETGEAR will notify you that an update is available when a new version is released.

Uninstall the Adapter Software

You can uninstall the adapter:

- From the Windows Settings interface.
 - By using the A9000 Installation Program.
1. To uninstall using Windows, select **Start > Settings > Apps > Netgear A9000 WiFi 7 Adapter > Uninstall**.
 2. To uninstall using the A9000 Installation Program:
 - a. Double-click on the installation program.
 - b. Select **Uninstall** to remove the software.

3

Troubleshooting and Frequently Asked Questions

This chapter covers the following topics:

- [Troubleshooting](#) on page 12
- [Frequently Asked Questions](#) on page 13

Troubleshooting

This section provides the following troubleshooting sections:

- [Adapter LED is Not Lit](#) on page 12
- [When I Connect to the Network, I Cannot Access Shared Resources Such as Printers](#) on page 12
- [Adapter Lost Its IP Address](#) on page 12

Adapter LED is Not Lit

If the LED is not lit, use these troubleshooting tips:

- Remove and reinsert the adapter.
- Check the Windows device manager to see if the adapter is recognized and enabled. Reinstall the adapter software, if necessary.
- Insert the adapter in a different USB port on your computer if one is available.

When I Connect to the Network, I Cannot Access Shared Resources Such as Printers

Try these troubleshooting tips:

- Make sure that the router or access point is physically connected to the Ethernet network.
- Make sure that the IP addresses and the Windows networking settings are configured correctly.

Adapter Lost Its IP Address

The adapter might lose its IP address after you upgrade the adapter software but do not reboot your computer. Either restart your computer, or connect to a different router or access point.

Frequently Asked Questions

This section addresses the following frequently asked questions (FAQs):

- [Do USB Ports Go into Sleep Mode if No Traffic Is Going to or from the Port?](#) on page 13
- [How Can I Improve the Speed of My WiFi Connection?](#) on page 13
- [How Can I View the IP Address of the Adapter?](#) on page 14

Do USB Ports Go into Sleep Mode if No Traffic Is Going to or from the Port?

USB devices go into sleep mode if a Windows USB feature called Selective Suspend is enabled, which it is by default. If your adapter or another USB device goes into Selective Suspend mode, the network disconnects. To prevent this type of network disconnection, disable Selective Suspend.

To disable Selective Suspend mode:

1. Select **Start > Control Panel > Hardware and Sound > Power Options > Edit Plan Settings > Change Advanced Power Settings > USB Settings**.
2. Change the setting for Selective Suspend mode to **Disabled**.

How Can I Improve the Speed of My WiFi Connection?

The connection speed can vary depending on the type of USB port on your computer, the capacity of the router or access point for the WiFi network, and the type of Internet connection. The following limits might apply:

- If the physical rate is limited to 54 Mbps, the adapter might be connected to an 802.11a, 802.11b, or 802.11g network. If you want a faster physical rate, connect to an 802.11n, 802.11ac, 802.11ax, or 802.11be network, if available.
- If the physical rate is limited to 54 Mbps, the network security might be WPA (TKIP). When WPA (TKIP) security mode is configured on the router or access point, WiFi regulations allow the adapter to connect at up to 54 Mbps only. For a faster connection, configure the security for the router or access point as WPA2, WPA3,

WPA + WPA2, or WPA2 + WPA3 mixed WiFi security. The connection speed still depends on the WiFi capacity of the router or access point.

- If your computer does not include a USB 3.0 or USB 2.0 port, the physical rate is limited to the 14 Mbps of the USB 1.1 legacy standard.

How Can I View the IP Address of the Adapter?

To check your Adapter IP Address:

1. Select the **Start** button.
2. Select **Settings**.
3. Select **Settings > Network > Internet > Properties**.

What Types of WiFi Security Does the Adapter Support?

Your WiFi adapter supports the following WiFi security types, in order from most secure to least secure:

- WPA3
- WPA2-PSK [AES]
- WPA-PSK [TKIP]
- 128-bit WEP data encryption
- 40-bit (also called 64-bit) WEP data encryption

! **NOTE:** While your adapter can connect to WiFi networks using WEP and WPA-PSK WiFi security, we recommend that you use newer and more secure options like WPA2-PSK or WPA3 if your devices support them. WEP and WPA-PSK use older and less secure encryption, so use caution when connecting to such networks.