


Installation

ProSAFE 8-Port Gigabit Switch


GS108v4

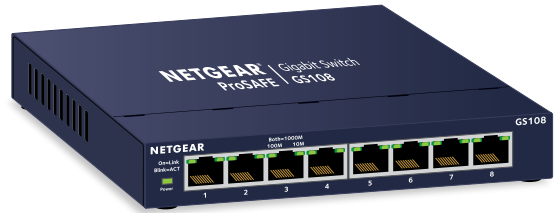

Step 1. Connect the equipment.




Internet

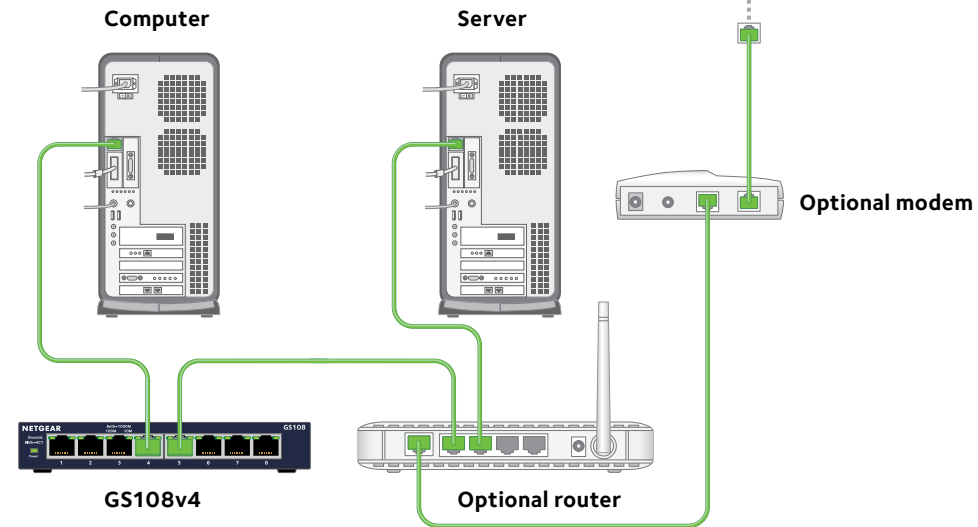


NETGEAR

Step 2. Connect to power and power on.

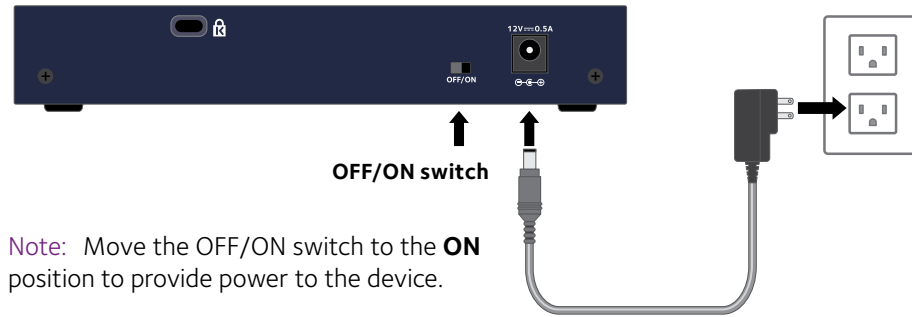

Note: Move the OFF/ON switch to the **ON** position to provide power to the device.

Step 3. Check the status.

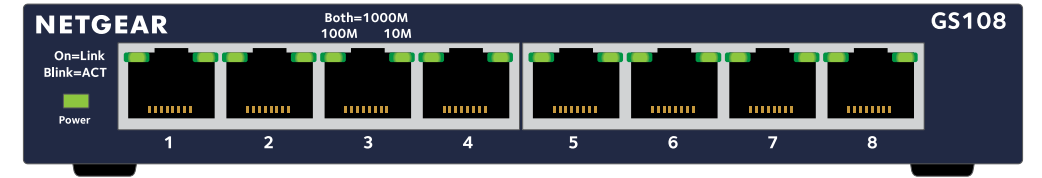

Power LED



Port LEDs



1000 Mbps link (both LEDs)

100 Mbps (left LED)

10 Mbps (right LED)

Activity (blinking)

No link (off)

Specification	Description
Network interface	RJ-45 connector for 10BASE-T, 100BASE-TX, or 1000BASE-T
Network cable	Category 5e (Cat 5e) or better Ethernet cable
Ports	8
Power adapter	12V @ 0.5 A DC input
Power consumption	4.92W max.
Weight	0.5 kg (1.11 lb)
Dimensions (W x D x H)	158 mm x 102 mm x 27 mm 6.2 in. x 4 in. x 1.1 in.
Operating temperature	0–40°C (32–104°F)
Operating humidity	10%–90% relative humidity, noncondensing
Electromagnetic compliance	CE Class B, FCC Class B, VCCI Class B, RCM Class B, EAC
Safety agency approvals	CE mark, EAC

Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at <https://my.netgear.com>.

You must register your product before you can use NETGEAR telephone support. NETGEAR recommends registering your product through the NETGEAR website. For product updates and web support, visit <http://support.netgear.com>.

NETGEAR recommends that you use only the official NETGEAR support resources.

For the current EU Declaration of Conformity, visit http://support.netgear.com/app/answers/detail/a_id/11621/.

For regulatory compliance information, visit <http://www.netgear.com/about/regulatory/>.

See the regulatory compliance document before connecting the power supply.



April 2014

NETGEAR, Inc.
350 East Plumeria Drive
San Jose, CA 95134, USA

NETGEAR, the NETGEAR logo, and Connect with Innovation are trademarks and/or registered trademarks of NETGEAR, Inc. and/or its subsidiaries in the United States and/or other countries. Information is subject to change without notice. © NETGEAR, Inc. All rights reserved.