

# Installation

## 8-Port Gigabit Ethernet Unmanaged Switch with Integrated Cable Management

Model GS908

Package contents



NETGEAR®


## Connect the Switch to Your Network

1. Connect a LAN port on the switch to a LAN port on a router that is connected to the Internet.
  2. Connect your devices to the other LAN ports on the switch.
  3. Connect the power adapter to the switch and plug the power adapter into an electrical outlet.
  4. Turn on the switch by moving the **OFF/ON** slider next to the DC input connector to the **ON** position.
- The blue Power LED on the front of the switch lights.

The port LEDs light as follows:

- **Off.** No link.
- **Solid green.** 1 Gbps link
- **Solid yellow.** 100 or 10 Mbps link
- **Blinking green.** 1 Gbps traffic
- **Blinking yellow.** 100 or 10 Mbps traffic

**Note:** To turn off all LEDs, press the **LED On/Off** button.

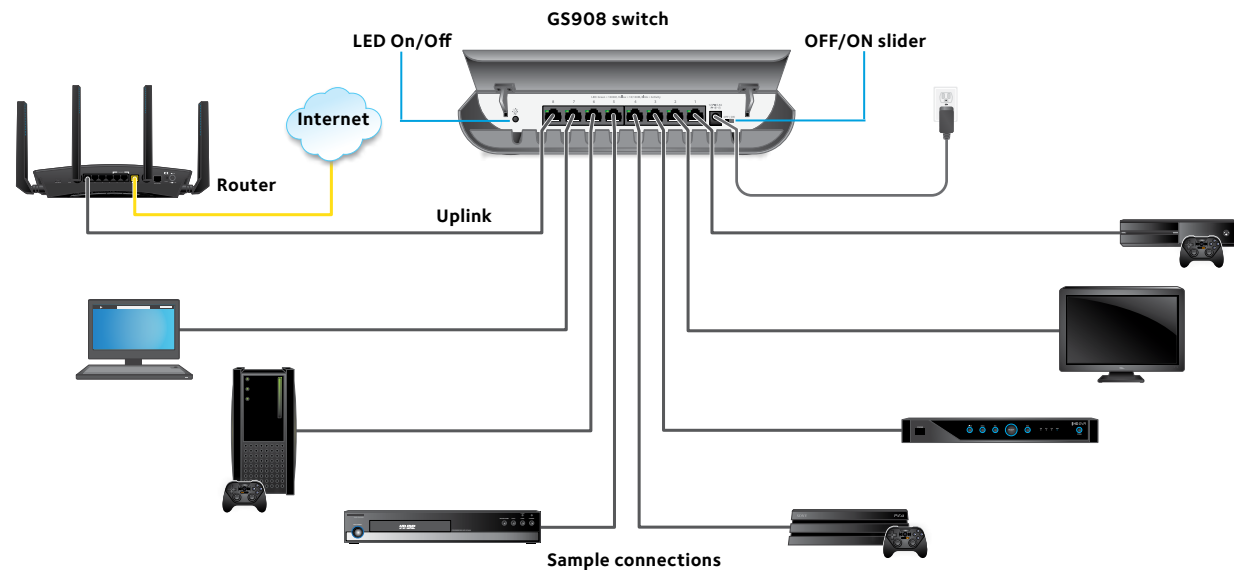

## Wall-Mount the Switch

1. Locate the two mount holes on the bottom panel of the switch.
2. Locate the M3.5 x 16 mm screws and anchors in the switch package.
3. Mark and drill two mounting holes in the wall where you want to mount the switch.  
The two mounting holes must be at a precise distance of 5.8 in. (147.5 mm) from each other.
4. Insert the anchors into the wall and tighten the screws with a No. 2 Phillips screwdriver.  
Leave about 0.125 in. (about 4 mm) of each screw protruding from the wall so that you can insert the screws into the holes on the bottom panel.
5. Line up the holes on the bottom panel with the screws in the wall and mount the switch to the wall.

## Specifications

Specification	Description
Network interfaces	Eight RJ-45 connectors for 10BASE-T, 100BASE-TX, or 1000BASE-T
Network cable	Category 5 (Cat 5) or better Ethernet cable
Power adapter input	100–240V 50/60 Hz
Power adapter output	12V @ 0.5A
Power consumption	3.1W maximum
Dimensions (W x D x H)	9.22 x 6.46 x 1.29 in. (234 x 164 x 33 mm)
Weight	0.79 lb (0.360 kg)
Operating temperature	32–104°F (0–40°C)
Operating humidity	10%–90% relative humidity, noncondensing

## Support

For more information about the switch, visit [www.netgear.com/support/product/GS908](http://www.netgear.com/support/product/GS908).

Thank you for purchasing this NETGEAR product. You can visit [www.netgear.com/support](http://www.netgear.com/support) to register your product, get help, access the latest downloads and user manuals, and join our community. We recommend that you use only official NETGEAR support resources.

Si ce produit est vendu au Canada, vous pouvez accéder à ce document en français canadien à <http://downloadcenter.netgear.com/other/>. (If this product is sold in Canada, you can access this document in Canadian-French at <http://downloadcenter.netgear.com/other/>.)

For the current EU Declaration of Conformity, visit [http://kb.netgear.com/app/answers/detail/a\\_id/11621](http://kb.netgear.com/app/answers/detail/a_id/11621).

For regulatory compliance information, visit <http://www.netgear.com/about/regulatory/>.

See the regulatory compliance document before connecting the power supply.



201-21965-03



**NETGEAR INTL LTD**  
Building 3, University Technology Centre  
Curraheen Road, Cork, Ireland

**NETGEAR, Inc.**

350 East Plumeria Drive  
San Jose, CA 95134, USA

© NETGEAR, Inc., NETGEAR, and the NETGEAR Logo are trademarks of NETGEAR, Inc. Any non-NETGEAR trademarks are used for reference purposes only.

November 2017