

Installation

NETGEAR®

NETGEAR ProSAFE® Smart Switch XS728T



Package Contents

- NETGEAR ProSafe Smart Switch XS728T
- Rubber footpads for tabletop installation
- AC power cord
- 19-inch rack-mount kit for rack installation
- Smart Switch resource CD

Configure the Switch

Install the Smart Control Center Utility and use it to configure the switch.

➤ To install the Smart Control Center Utility on a computer:

1. Insert the resource CD into your CD drive.
2. Run the Setup program to install the Smart Control Center Utility. The Installation Wizard guides you through the installation.

Connect Your Switch

If you have a DHCP server in your network see *Connect the Switch to Your Network*.

If you are using static IP addresses in your network, first see *Configure the Switch with a Static IP Address*, and then see *Connect the Switch to Your Network*.

Configure the Switch with a Static IP Address

If you are using a static IP address in your network, configure the switch IP address before connecting the switch to your network. The default IP address of the switch is 192.168.0.239.

Note: If you are using a DHCP server in your network, this procedure does not apply to you; instead, go directly to *Connect the Switch to Your Network*.


➤ To configure the switch with a static IP address:

1. Set up the computer with a static IP address in the 192.168.0.x subnet.
2. Connect the computer to the switch using an Ethernet cable.
3. In a browser, enter the default IP address of your switch. The default IP address is 192.168.0.239.
A login screen displays.
4. Enter **password** for the password.
5. Select **System > Management > IP Configuration**.
6. Enter the static IP address you want to assign the switch.
7. Click the **Apply** button.

Connect the Switch to Your Network

➤ To connect the switch to your network:

1. Connect each computer to an RJ-45 network port on the switch front panel.
Use Category 5e (Cat 5e) or better Ethernet cable (Cat 6, Cat 6a, or Cat 7) terminated with an RJ-45 connector to make 10 G connections.
Note: Cat 6a or Cat 7 cables are recommended if cable distance is greater than 45 m (148 ft).
2. Connect the switch to your network.

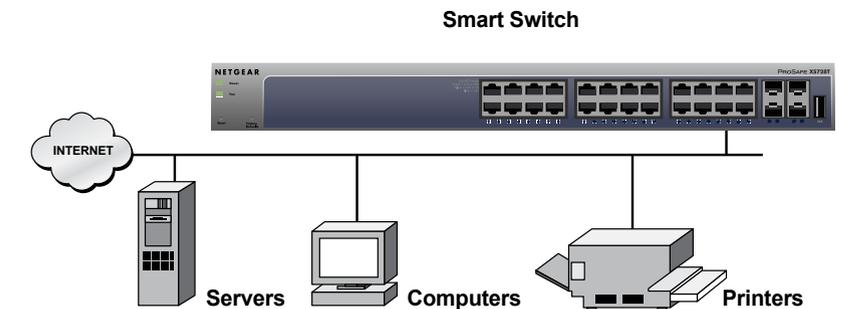


3. Power on the switch.
4. Verify that the computer with the Smart Control Center Utility is on the same subnet as the switch.

Configure the Switch with the Smart Control Center Utility

➤ To configure the switch with the Smart Control Center Utility:

1. Double-click the Smart Control Center Utility icon on your desktop or in the Windows Start menu to run the utility. The Smart Control Center displays.
2. Click the **Discover** button.

The Smart Control Center Utility finds the switch and displays its MAC address, IP address, and model number.

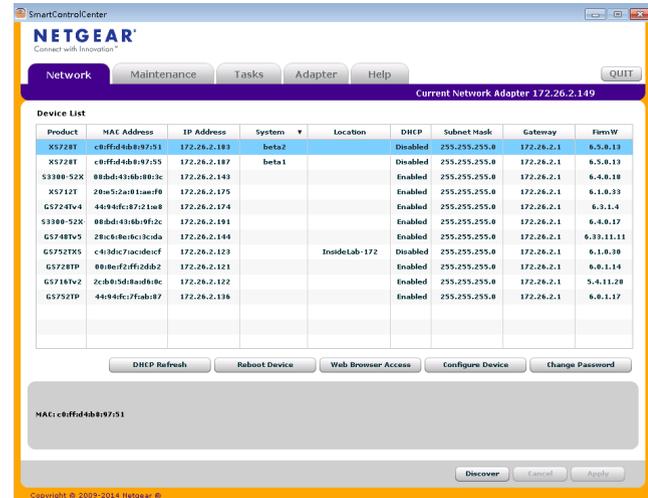


If the utility does not discover your switch, verify that the cable connections are secure and that the IP address configuration of the computer is in the same subnet as the switch, and click the **Discover** button.

3. Click the line for the switch you want to configure.
4. Click the **Web Browser Access** button to view the switch Login screen.



5. Enter the default password of **password** in lower-case letters and click the **Login** button.

The System Information screen displays.

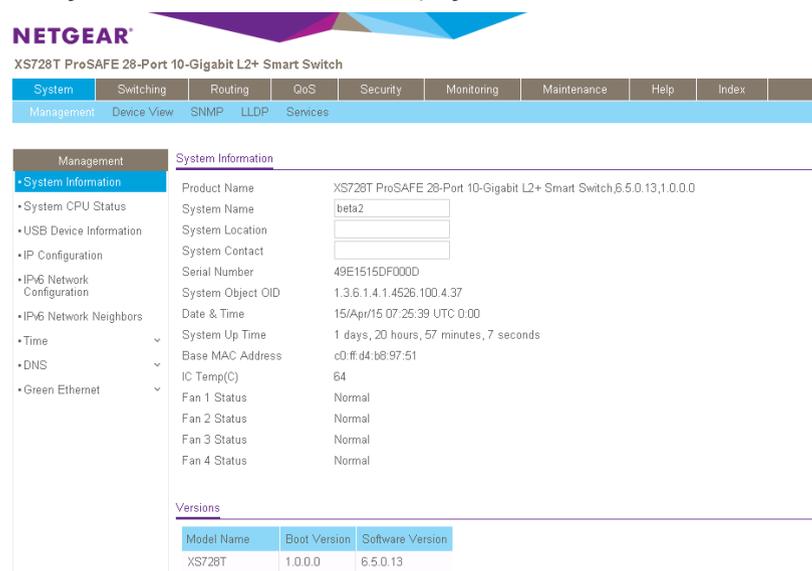

6. Configure the switch for your network.
For more information, see the *X5728T Software Administration Manual*.

Troubleshooting Tips

Here are some tips for correcting simple problems you might have.

- Be sure to power on your computer and switch in the following sequence:
 1. Turn on the switch and wait 2 minutes.
 2. Turn on the computer and connect to the switch.
- Make sure the Ethernet cables are plugged in.

For each powered-on computer connected to the switch, the corresponding switch LAN port status LED is lit.

- Make sure the network settings of the computer are correct.

In most cases, computers should be configured to obtain an IP address through DHCP. If your network uses static IP addresses, be sure that the switch and computer are configured with valid IP addresses. For more information, see the software administration manual.

Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at <https://my.netgear.com>.

You must register your product before you can use NETGEAR telephone support. NETGEAR recommends registering your product through the NETGEAR website. For product updates and web support, visit <http://support.netgear.com>.

NETGEAR recommends that you use only the official NETGEAR support resources.

For the current EU Declaration of Conformity, visit http://support.netgear.com/app/answers/detail/a_id/11621/.

For regulatory compliance information, visit <http://www.netgear.com/about/regulatory/>.

See the regulatory compliance document before connecting the power supply.

