



NETGEAR®

ProSafe Dual Band Wireless VPN Firewall FWAG114


Installation Guide

Follow these quick steps to install your firewall.


Before you begin, locate the broadband Internet configuration settings from your Internet Service Provider. You can also consult the Install Assistant on the *ProSafe Dual Band Wireless VPN Firewall CD*.

1 Connect the Firewall


- Turn off your computer and broadband modem.
- Disconnect the Ethernet cable from your computer (A) which connects to your broadband modem.

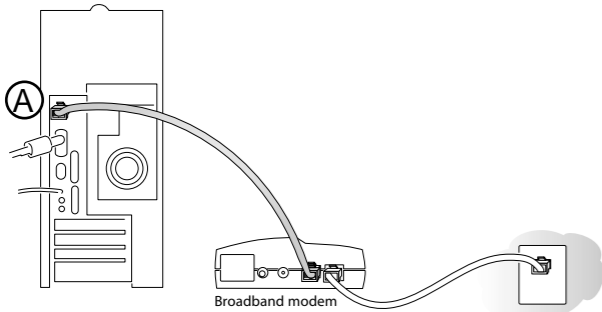

- Connect the Ethernet cable from your broadband modem to the Internet port (A) on the FWAG114.

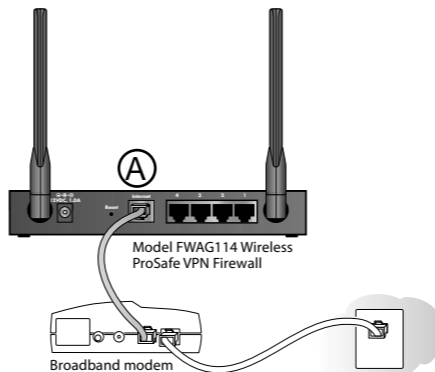

- Connect the Ethernet cable which came with the router from a Local port on the router (B) to your computer.

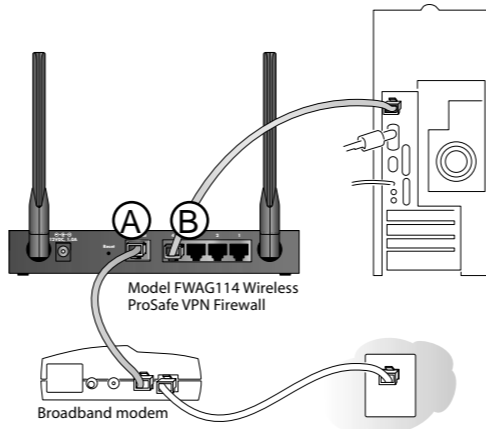

- Turn on the broadband modem and wait about 30 seconds.
- After the lights on the modem stop blinking, turn on the FWAG114.
- Now, turn on your computer.

- Verify the following:
 - When you turn the firewall on, the power light goes on.
 - The test light turns on within a few seconds, and then goes off after approximately 10 seconds.
 - The local lights are lit for any connected computers.
 - The Internet light is lit, indicating a link has been established to the broadband modem.

Note: For wireless placement and range guidelines, and wireless configuration instructions, please see the *Reference Manual* on the *ProSafe Dual Band Wireless VPN Firewall CD*.

2 Log in to the Firewall

Note: To connect to the firewall, your computer needs to be configured to obtain an IP address automatically via DHCP. For instructions on how to do this, please see Appendix C in the *Reference Manual* on the *ProSafe Dual Band Wireless VPN Firewall CD*.

- Connect to the firewall by typing `http://192.168.0.1` in the address field of Internet Explorer or Netscape® Navigator.



- For security reasons, the firewall has its own user name and password. When prompted, enter **admin** for the firewall user name and **password** for the firewall password, both in lower case letters.

Note: The user name and password are not the same as any user name or password you may use to log in to the Internet.

3 Connect to the Internet

Smart Wizard

The Smart Wizard Can Detect The Type Of Internet Connection That You Have.

Do You Want The Smart Wizard To Try And Detect The Connection Type Now?

Yes.

No. I Want To Configure The Router Myself.

Next

- You are now connected to the firewall. If you do not see the menu above, click the Smart Wizard link on the upper left of the main menu.
- Click **Next** to follow the steps in the Smart Wizard to input the firewall configuration settings. See the green ISP Guide for help with identifying your ISP settings (for US only).
- At the end of the Smart Wizard, click the **Test** button to verify your Internet connection and register your product.

Note: If you were unable to connect to the firewall, please refer to “Basic Functioning” in the “Troubleshooting” chapter of the *Reference Manual* on the *ProSafe Dual Band Wireless VPN Firewall CD*.

Technical Support

PLEASE REFER TO THE SUPPORT INFORMATION CARD THAT SHIPPED WITH YOUR PRODUCT.

By registering your product at www.NETGEAR.com/register, we can provide you with faster expert technical support and timely notices of product and software upgrades.

NETGEAR, INC.

Support Information

Phone: 1-888-NETGEAR (For US & Canada only) - 24 x 7 phone support.

See Support information card for other countries.

E-mail: support@NETGEAR.com (24 x 7 online support)

www.NETGEAR.com



M - 1 0 0 5 4 - 0 1

April 2003

©2003 NETGEAR, Inc. NETGEAR, the Netgear logo, The Gear Guy, Everybody's connecting, and Auto Uplink are trademarks or registered trademarks of Netgear, Inc. in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. All rights reserved.